

Closure Dates

Dates

THURSDAY
9/1


Times

7am-7pm

Posted Speed	Spacing Between Signs			"Buffer" Space
	A	B	C	
20				50
25	100	100	100	75
30				100
35	350	350	350	125
40				150
45				180
50	500	500	500	210
55				250
60				285
65	700	700	700	325
70				365
Freeways:				
55				250
60	1000	1500	2640	285
65				325
70				365

Lane Width	10 Feet					11 Feet					12 Feet					Shoulder Tapers	
	MERGING		SHIFTING			MERGING		SHIFTING			MERGING		SHIFTING			SHOULDER	
MPH	L	Cones	L	Cones	L	L	Cones	L	Cones	L	L	Cones	L	Cones	L	L	Cones
20	70	5	35	3		75	5	40	3		80	5	40	3		25	3
25	105	6	55	3		115	6	60	4		125	6	65	4		35	3
30	150	6	75	4		165	7	85	4		180	7	90	4		50	3
35	205	7	105	4		225	8	115	5		245	8	125	5		70	4
40	270	8	135	5		295	9	150	5		320	9	160	5		90	4
45	450	11	225	6		485	12	250	7		540	13	270	7		150	6
50	500	11	250	6		550	12	275	7		600	13	300	7		170	6
55	550	11	275	6		605	12	305	7		660	13	330	7		185	6
60	600	11	300	6		660	12	330	7		720	13	360	7		200	6
65	650	11	325	6		715	12	370	7		780	13	390	7		220	7
70	700	11	350	6		770	12	385	7		840	13	420	7		235	7

"L" for shoulder taper equals Shoulder Width x Speed.
Figures shown are for 10' shoulders.

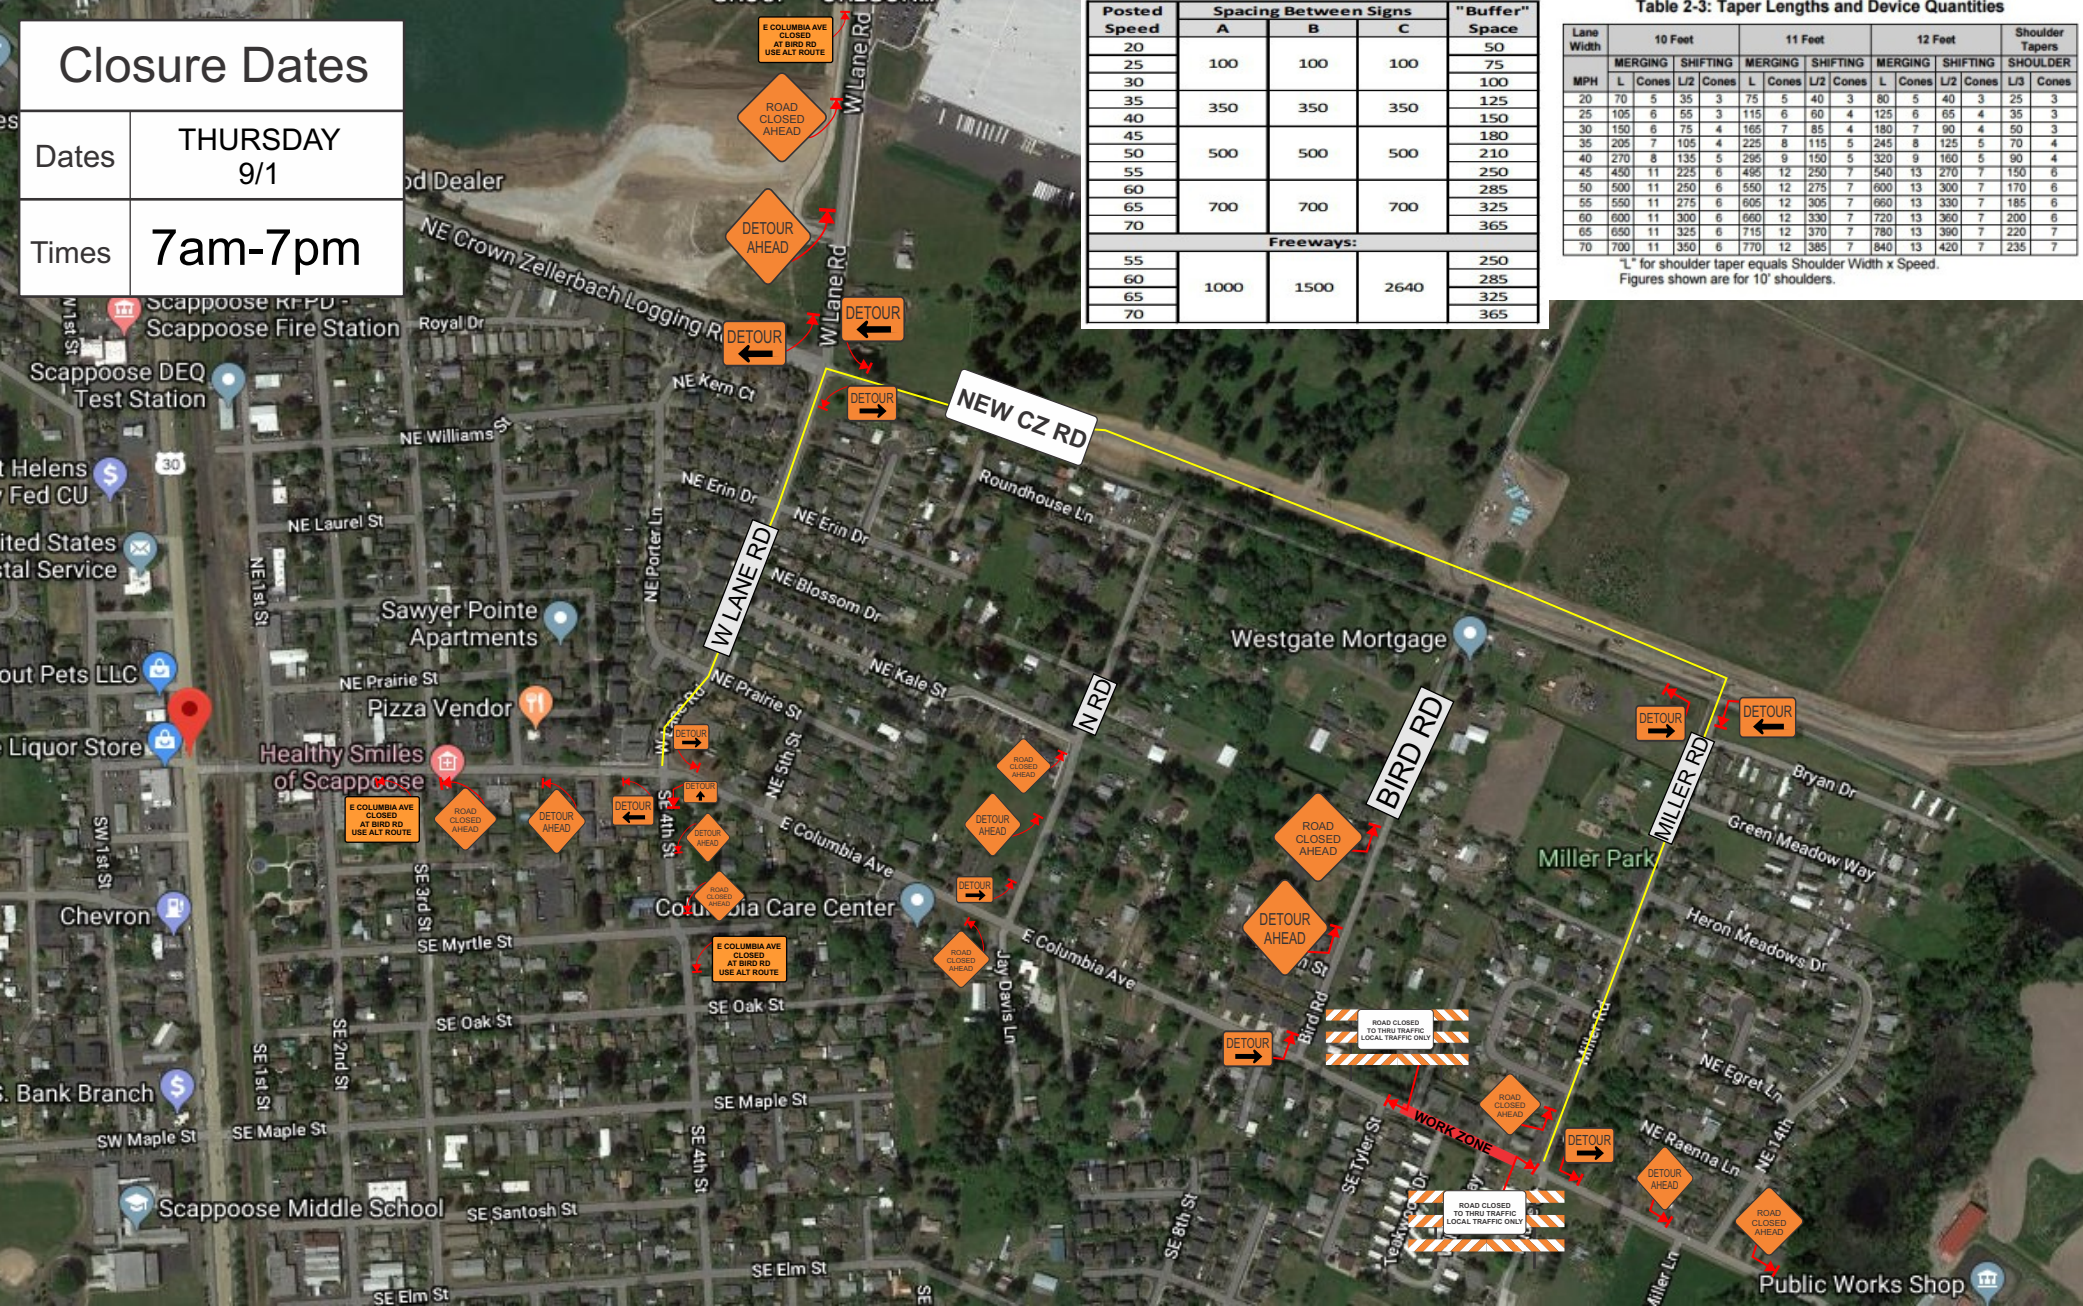

Road Closure E Columbia Ave for paving.



Work Zone

Detour

Owner	Airpark		
Project Name	Scappoose Industrial Subdivision		
Prime Contractor	Tapani Inc		
Phone	Sheet Number	Date	
360-687-1148	1	8/23/22	
Prepared By	Samantha Ortman (360)635-3323		